


# 三排滚柱式回转支承承载能力曲线图


(JB/T 2300—1999)

## Single-Row Crossed Rollers Slewing Ring (Standard Series 13)


适用条件：本承载能力适用于按 GB/T3098.1 制造的 8.8 级、10.9 级、12.9 级螺栓和按 3098.2 制造的螺母，其中线①为静态承载能力曲线，线②为动态承载能力曲线。

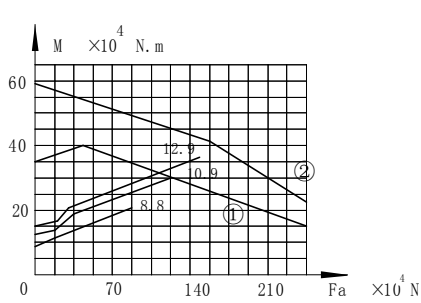


13.25.500

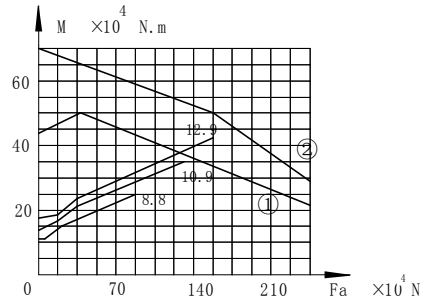


13.25.560

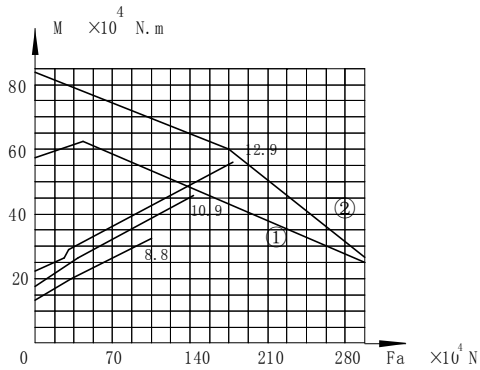


13.25.630

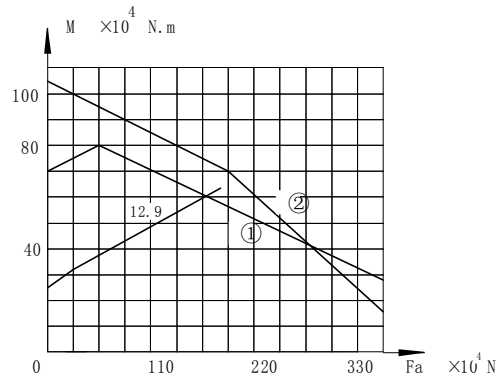


13.25.710

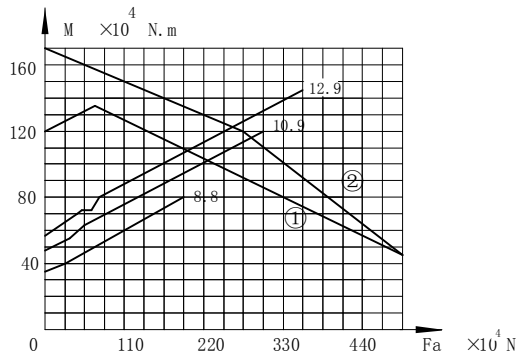


13.32.800

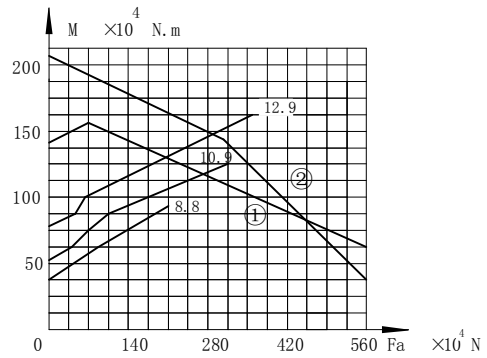


11.32.900

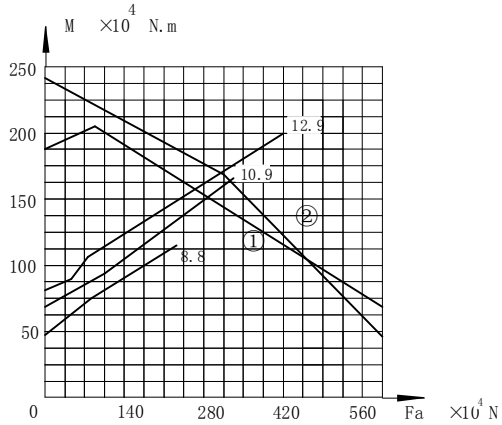


13.32.1000

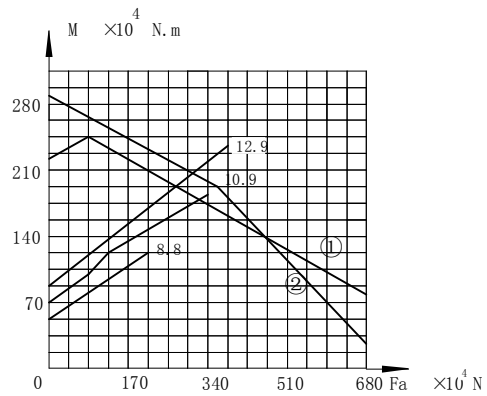


13.32.1120

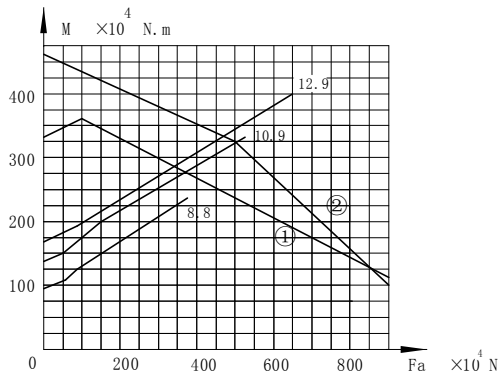


13.40.1250

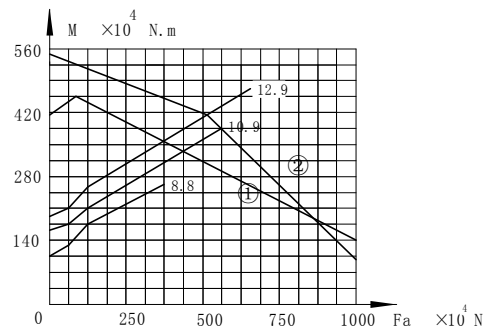


13.40.1400

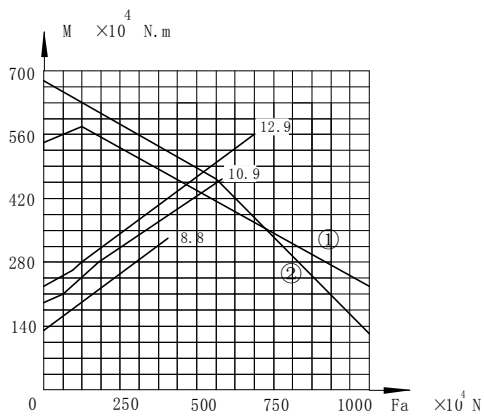


13.40.1600

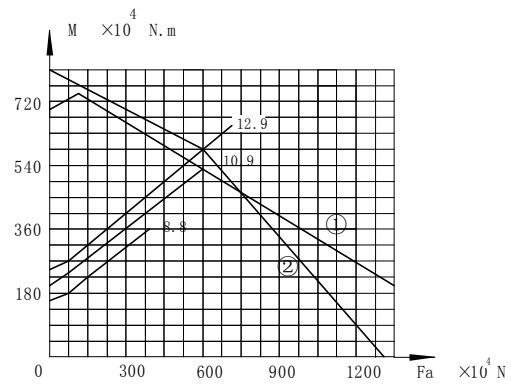


13.40.1800

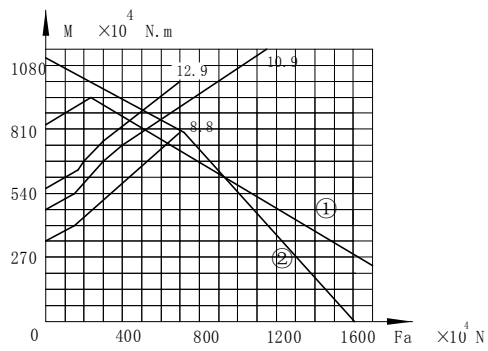


13.45.2000

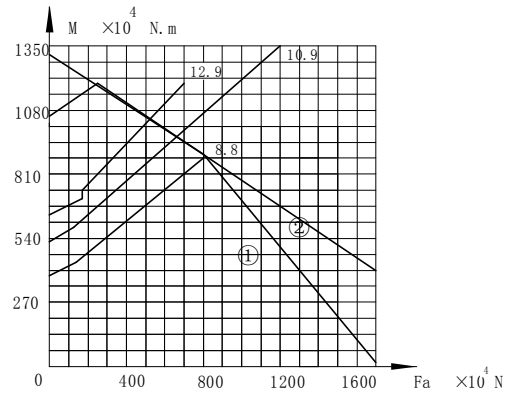


13.45.2240

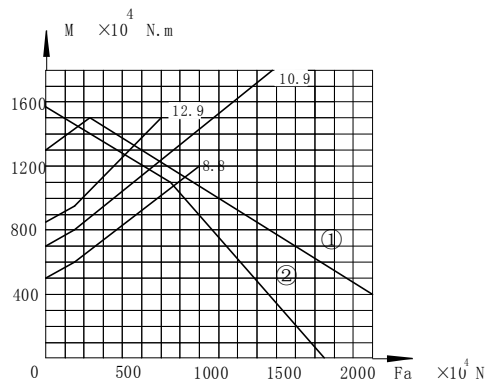


13.45.2500

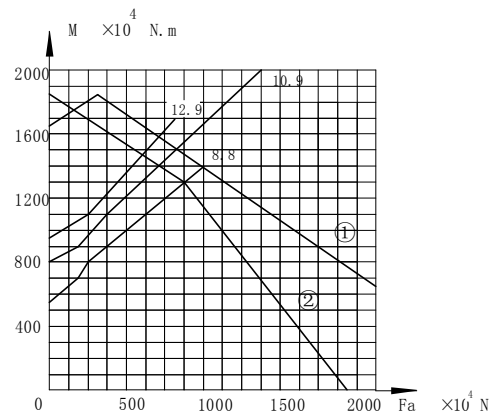


13.45.2800

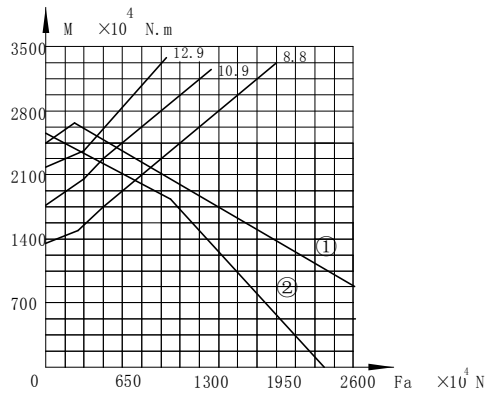


13.50.3150

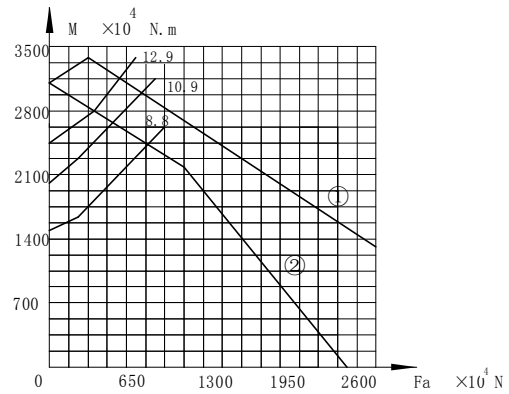

13.50.3550

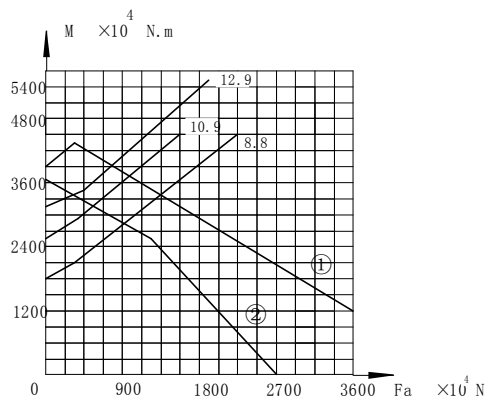

13.50.4000

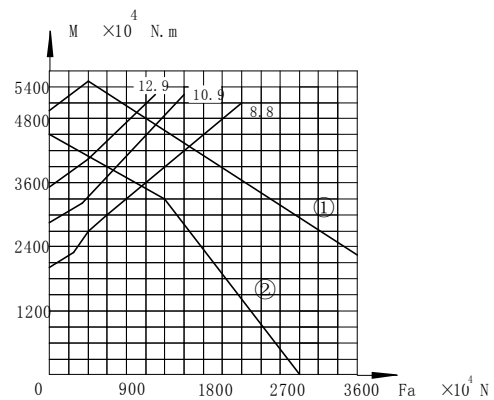

13.50.4500